

Model: C17D5 (X-Series)
Frequency: 50
Fuel Type: Diesel

» Generator set data sheet



Our energy working for you.™

Spec sheet:	SS23-CPGK
Noise data sheet (Open/enclosed):	ND50-OS550 / ND50-CS550
Airflow data sheet:	AF50-550
Derate data sheet (Open/enclosed):	DD50-OS550 / DD50-CS550
Transient data sheet:	TD50-550

Fuel consumption	Standby				Prime			
	kVA (kW)				kVA (kW)			
Ratings	16.5 (13.2)				14.9 (11.88)			
Load	1/4	1/2	3/4	Full	1/4	1/2	3/4	Full
gph	0.2	0.4	0.6	0.8	0.2	0.4	0.6	0.8
L/hr	0.96	1.92	2.87	3.83	0.91	1.82	2.72	3.63

Engine	Standby rating	Prime rating
Engine manufacturer	Cummins	
Engine model	X2.5G2	
Configuration	4 Cycle; In-line; 3 Cylinder Diesel	
Aspiration	Naturally Aspirated	
Gross engine power output, kWm	27	24.37
BMEP at set rated load, kPa	851	768.1
Bore, mm	91.7	
Stroke, mm	127	
Rated speed, rpm	1500	
Piston speed, m/s	7.62	
Compression ratio	18.5:1	
Lube oil capacity, L	6.5	
Overspeed limit, rpm	1650	
Regenerative power, kW	2	
Governor type	Mechanical - Std	
Starting voltage	12 Volts DC	

Fuel flow	
Maximum fuel flow, L/hr	40
Maximum fuel inlet restriction, mm Hg	28.0249
Maximum fuel inlet temperature (°C)	60

Air	
Combustion air, m ³ /min	2.30
Maximum air cleaner restriction, kPa	4



MAKAWA POWER GENERATOR

WEBSITE : [HTTP://MAKAWA.VN](http://MAKAWA.VN)

HOTLINE : 0985.898.950

Exhaust	Standby rating	Prime rating
Exhaust gas flow at set rated load, m ³ /min	N/A	N/A
Exhaust gas temperature, °C	660	660
Maximum exhaust back pressure, kPa	3.38	

Standard set-mounted radiator cooling		
Ambient design, °C	50	
Fan load, KW _m	0.6	
Coolant capacity (with radiator), L	7	
Cooling system air flow, m3/sec @ 12.7mmH2O	0.78	
Total heat rejection, BTU/min	2561	N/A
Maximum cooling air flow static restriction mmH2O	N/A	

Open set derating factors kVA (kW)

Note: Standard open genset options running at 400V, 150m above sea level. For enclosed product derates, please refer to datasheet - DD50-CS550.

	27 °C	40 °C	45 °C	50 °C	55 °C
Standby	16.5 (13.2)	15.7 (12.54)	15.5 (12.41)	15.2 (12.14)	14.9 (11.88)
Prime	14.9 (12)	14.1 (11.29)	14 (11.17)	13.7 (10.93)	13.4 (10.69)


Weights*	Open	Enclosed
Unit dry weight kgs	418.5	743.5
Unit wet weight kgs	582	907

* Weights represent a set with standard features. See outline drawing for weights of other configurations


Dimensions	Length	Width	Height
Standard open set dimensions	1667	930	1247
Enclosed set standard dimensions	2082	930	1448

Genset outline

Open set

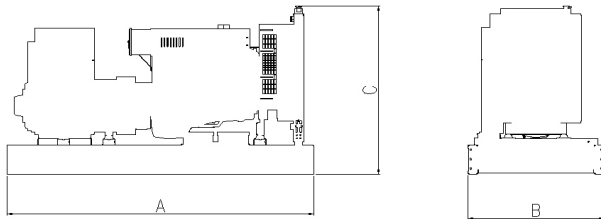

Enclosed set

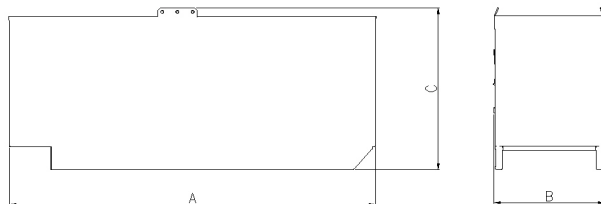

Outlines are for illustrative purposes only. Please refer to the genset outline drawing for an exact representation of this model.

©2009 | Cummins Power Generation Inc. | All rights reserved | Specifications subject to change without notice | Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. PowerCommand and "Our energy working for you." are trademarks of Cummins Power Generation. Other company, product, or service names may be trademarks or service marks of others.



MAKAWA POWER GENERATOR

WEBSITE : [HTTP://MAKAWA.VN](http://MAKAWA.VN)

HOTLINE : 0985.898.950

Alternator data

Feature code	Connection ¹	Temp rise degrees C	Duty ²	Alternator	Voltage
-	3 Phase	163/150C	S/P	PI044G	380-415V
-	3 Phase	125/105C	S/P	PI044H	380-440V

Ratings definitions

Emergency Standby Power (ESP)	Limited-Time running Power (LTP):	Prime Power (PRP)	Base Load (Continuous) Power (COP)
Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	Applicable for supplying power to a constant electrical load for limited hours. Limited Time Running Power (LTP) is in accordance with ISO 8528.	Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous Power (COP) in accordance with ISO 8528, ISO 3046, AS 2789, DIN 6271 and BS 5514.

Formulas for calculating full load currents:

Three phase output

$$\frac{\text{kW} \times 1000}{\text{Voltage} \times 1.73 \times 0.8}$$

Single phase output

$$\frac{\text{kW} \times \text{Single Phase Factor} \times 1000}{\text{Voltage}}$$

See your distributor for more information.

Cummins Power Generation
 Manston Park, Columbus Avenue
 Manston, Ramsgate
 Kent CT12 5BF, UK
 Telephone: +44 (0) 1843 255000
 Fax: +44 (0) 1843 255902
 E-Mail: cpg.uk@cummins.com
 Web: www.cumminspower.com

©2009 | Cummins Power Generation Inc. | All rights reserved | Specifications subject to change without notice | Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. PowerCommand and "Our energy working for you." are trademarks of Cummins Power Generation. Other company, product, or service names may be trademarks or service marks of others.




MAKAWA POWER GENERATOR

WEBSITE : [HTTP://MAKAWA.VN](http://MAKAWA.VN)

HOTLINE : 0985.898.950

Diesel Generator Set

X2.5 Series Genset

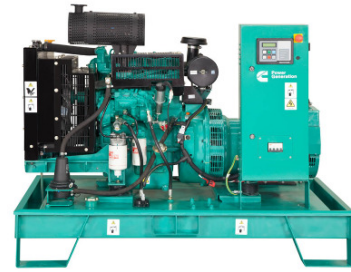

> Specification sheet

15kVA – 27kVA @ 50Hz
10.8kW - 20kW 60Hz



Our energy working for you.™

Description

This Cummins® Power Generation commercial generator set is a fully integrated power generation system, providing optimum performance, reliability, and versatility for stationary standby, prime power, and continuous duty applications.



This generator set is designed in facilities certified to ISO9001 and manufactured in facilities certified to ISO9001 or ISO9002.



The Prototype Test Support (PTS) program verifies the performance integrity of the generator set design. Cummins Power Generation products bearing the PTS symbol meet the prototype test requirements of NFPA 110 for Level 1 systems.



All low voltage models are CSA certified to product class 4215-01.



This generator set is available with CE certification.

Features

Heavy-Duty Engine - Rugged 4-cycle industrial diesel delivers reliable power, low emissions and fast response to load changes.

Optional Excitation Boost System (EBS) - Offers enhanced motor starting and fault clearing short circuit capability.

Alternator - Several alternator sizes offer selectable motor starting capability with low reactance 2/3 pitch windings, low waveform distortion with non-linear loads and fault clearing short-circuit capability.

Control system - PowerStart control, microprocessor-based generator set monitoring and control system provides a simple operator interface to the generator set, manual and remote start/stop control and shutdown fault indication.

Cooling system - Standard integral set mounted system, designed and tested for rated ambient temperatures, simplifies facility design requirements for rejected heat.

Enclosures – optional weather-protective and sound-attenuated enclosure.

Warranty - Backed by a comprehensive warranty and worldwide distributor network.

3-Phase Ratings

Model	Standby Rating		Prime Rating	
	50Hz kVA (kW)	60Hz kW (kVA)	50Hz kVA (kW)	60Hz kW (kVA)
C17 D5	17 (13.2)	-	15 (11.88)	-
C12 D6	-	12 (15)	-	10.8 (14)
C22 D5	22 (17.6)	-	20 (15.84)	-
C16 D6	-	16 (20)	-	14.4 (18)
C28 D5	28 (22)	-	25 (19.8)	-
C20 D6	-	20 (25)	-	18 (23)

1-Phase Ratings*

Model	Standby Rating		Prime Rating		Datasheet
	50Hz kVA (kW)	60Hz kW (kVA)	50Hz kVA (kW)	60Hz kW (kVA)	
C17 D5	13 (13)	-	11.8 (11.8)	-	DS336-CPGK
C12 D6	-	12 (12)	-	10.9 (10.9)	DS337-CPGK
C22 D5	17 (17)	-	15.5 (15.5)	-	DS338-CPGK
C16 D6	-	16 (16)	-	14.5 (14.5)	DS339-CPGK
C28 D5	22 (22)	-	20 (20)	-	DS340-CPGK
C20 D6	-	20 (20)	-	18.1 (18.1)	DS341-CPGK

* 1.0 PF

Our energy working for you.™

www.cumminspower.com

© 2009 Cummins Power Generation Inc. All rights reserved. Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. "Our energy working for you." is a trademark of Cummins Power Generation. Specifications are subject to change without notice. SS26-CPGK-RevA (11/09).



Generator Set Specifications

Governor Regulation	ISO8528 Part 1 Class G2
Voltage Regulation, No Load to Full Load	± 1%
Random Voltage Variation	± 1%
Frequency Regulation	Droop
Random Frequency Variation	± 0.25%
EMC Compatibility	Yes

Engine Specifications

Design	4 cycle, In-line, naturally aspirated
Bore	91.7
Stroke	127
Displacement	2.5 litre (153 in3)
Cylinder Block	Alloy Cast iron, In-line 3 cylinder
Battery Charging Alternator	36 Amps
Starting Voltage	12 volt, negative ground
Fuel System	Direct Injection
Fuel Filter	Spin-on fuel filters with water separator
Air Cleaner Type	Dry replaceable element
Lube Oil Filter Type(s)	Spin on full flow filter, Filtration efficiency 25 micron 99% (min)
Standard Cooling System	122°F (50°C) ambient radiator with coolant Recovery System

Alternator Specifications

Design	Brushless single bearing
Stator	2/3 pitch
Insulation System	Class H
Standard Temperature Rise	125°C – 163°C
Exciter Type	Self excited
Phase Rotation	A (U), B (V), C (W)
Alternator Cooling	Direct drive centrifugal blower fan
AC Waveform Total Harmonic Distortion	< 5% no load to full linear load, < 3% for any single harmonic
Telephone Influence Factor (TIF)	< 50 per NEMA MG1-22.43
Telephone Harmonic Factor (THF)	< 3

Available Voltages

50Hz Line – Neutral / Line – Line	60Hz Line – Neutral / Line – Line
<ul style="list-style-type: none"> • 240/416 • 255/480 • 230/400 • 220/380 	<ul style="list-style-type: none"> • 127/220 • 120/208 • 115/200 • 110/190
<ul style="list-style-type: none"> • 277/480 • 240/416 • 255/440 	<ul style="list-style-type: none"> • 127/220 • 120/208
50Hz Single Phase	60Hz Single Phase
<ul style="list-style-type: none"> • 220 • 230 • 240 	<ul style="list-style-type: none"> • 220 • 230 • 240

Generator Set Options

Engine

- Electronic engine governing
- Coolant heater 120/240V

Cooling

- Antifreeze 50/50 (Ethylene glycol)

Enclosure

- Optional Silent Power Canopy

Alternator

- Alternator heater
- Excitation Boost System (EBS)

Control Panel

- PowerCommand 1.1
- 2/4 pole Main Circuit Breaker

Base frame

- Dual skin fully contained fuel tank
- 500 litre fuel tank

Warranty

- 5 years for Standby application
- 2 years for Prime application

*Note: Some options may not be available on all models – consult factory for availability.

Our energy working for you.™

www.cumminspower.com

© 2009 Cummins Power Generation Inc. All rights reserved. Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. "Our energy working for you." is a trademark of Cummins Power Generation. Specifications are subject to change without notice. SS26-CPGK-RevA (11/09).



Generator set control

PowerStart 500



Control system

The PowerStart control is a microprocessor-based generator set monitoring and control system. The control provides a simple operator interface to the generator set, manual and remote start/stop control and shutdown fault indication. The integration of all control functions into a single control provides enhanced reliability and performance compared to conventional generator set control systems. This control has been designed and tested to meet the harsh environment in which gensets are typically applied.

The PowerStart generator set control is suitable for use on a wide range of generator sets in non-parallel applications. It is suitable for use with reconnectable or non-reconnectable generators, can be configured for either 50 Hz or 60 Hz and voltage and power connection from 190-600 VAC line-to-line.

This control includes an intuitive operator interface that allows for complete genset control as well as system metering, fault annunciation, configuration and diagnostics. The interface includes seven generator set status LED lamps with both internationally accepted symbols and English text to comply with customer needs. The interface also includes an LED backlit LCD display with tactile-feel soft-switches for easy operation and screen navigation. The manual/auto/stop switch function is integrated into the interface panel.

All data on the control can be viewed by scrolling through screens with the navigation keys. The control displays the current active fault and a time-ordered history of the five previous faults.

Power for this control is derived from the generator set starting batteries and functions over a voltage range from 8 VDC to 16 VDC.

Major Features

- **LCD display** - 16 character x 2 line alphanumeric LED backlight LCD.
- **Generator set monitoring and protection.**
- **12 VDC battery operation.**
- **Engine Starting** - Includes solid state output to operate external relays start the engine, fuel shut FSO), and glow plugs. Start disconnect is achieved by monitoring main alternator frequency.
- **Remote Start Capability** – Interface to transfer switch.
- **Environmental protection** – The control is designed for reliable operations in harsh environments.
- **Warranty and service** - Backed by a comprehensive warranty and worldwide distributor service network.
- **Certification** - Suitable for use on generator sets are designed, manufactured, tested and certified relevant ISO, IEC Mil Std. and CE standards.

Our energy working for you.™

www.cumminspower.com

© 2009 Cummins Power Generation Inc. All rights reserved. Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. "Our energy working for you." is a trademark of Cummins Power Generation. Specifications are subject to change without notice. SS26-CPGK-RevA (11/09).

Base control functions

LCD display - 16 character x 2 line alphanumeric LED backlight LCD.

Operation interface - Six tactile-feel membrane switches for LCD navigation, genset operation and control setup. These switches are indicated by internationally accepted symbols and English text.

Data logs - Includes engine run time and controller on time.

Fault history - Provides a record of the most recent fault conditions with control hours time stamp. Up to 5 events are stored in the control non-volatile memory.

Alternator data:

- Voltage (single or three phase line-to-line and line-to-neutral)
 - Current (single or three phase)
 - KVA (three phase and total)
 - Frequency
- Engine data
- Starting battery voltage
 - Engine running hours
 - Engine temperature
 - Engine oil pressure

Service adjustments - The control includes provisions for adjustment and calibration of generator set control functions. Functions include:

- Voltage selection
- Frequency selection
- Configurable input set up
- Configurable output set up
- Meter calibration
- Units of measurement

Protective functions

On operation of a protective function the control will indicate a fault by illuminating the appropriate status LED, as well as display the fault code and fault description on the LCD. The nature of the fault and time of occurrence are logged in the control. The service manual and InPower Service Tool provide service keys and procedures based on the service codes provided.

Field control interface

Input signals to the base control include:

- Remote start
- Local and emergency stop
- Configurable inputs: Control includes (4) input signals from customer

Output signals from the control include:

Configurable output: Control includes (1) solid state driver rated at 1 A. This output can be configured to activate on ready to load, or common warning and common shutdown condition.

Communications connections include:

PC tool interface: This RS-485 communication port allows the control to communicate with a personal computer running InPower software. Note – An RS-232 or USB to RS-485 converter is required for communication between PC and control.



Ratings Definitions

Emergency Standby Power (ESP):

Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.

Limited-Time running Power (LTP):

Applicable for supplying power to a constant electrical load for limited hours. Limited Time Running Power (LTP) is in accordance with ISO 8528.


Prime Power (PRP):

Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.


Base Load (Continuous) Power (COP):

Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous Power (COP) in accordance with ISO 8528, ISO 3046, AS 2789, DIN 6271 and BS 5514.

Open Set

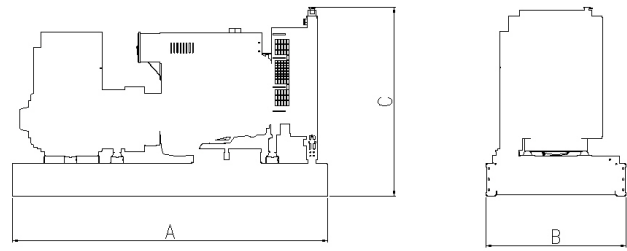

Enclosed Set

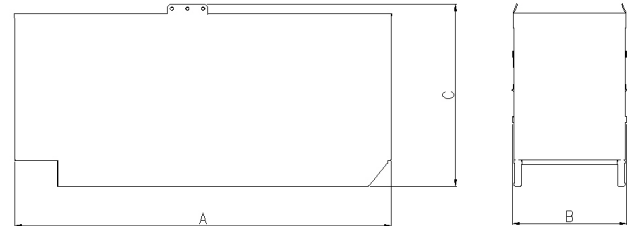

This outline drawing is to provide representative configuration details for Model series only.

See respective model data sheet for specific model outline drawing number.

Do not use for installation design.

Open Set

Model	Dim "A" mm	Dim "B" mm	Dim "C" mm	Set weight* dry kg	Set weight* wet kg
C17 D5	1667	930	1247	418.5	582
C12 D6	1667	930	1247	405	568.5
C22 D5	1667	930	1247	418.5	582
C16 D6	1667	930	1247	405	568.5
C28 D5	1667	930	1247	441.5	605
C20 D6	1667	930	1247	418.5	582

Enclosed Set

Model	Dim "A" mm	Dim "B" mm	Dim "C" mm	Set weight* dry kg	Set weight* wet kg
C17 D5	2082	930	1448	743.5	907
C12 D6	2082	930	1448	730	893.5
C22 D5	2082	930	1448	743.5	907
C16 D6	2082	930	1448	730	893.5
C28 D5	2082	930	1448	766.5	930
C20 D6	2082	930	1448	743.5	907

*Note: Weights represent a set with standard features. Does not include fuel. See outline drawings for weights of other configurations.

Cummins Power Generation

Europe, CIS, Middle East and Africa

Manston Park Columbus Ave.
Manston Ramsgate
Kent CT12 5BF United Kingdom
Phone 44 1843 255000
Fax 44 1843 255902

Americas

1400 73rd Avenue N.E.
Minneapolis, MN 55432 USA
Phone 763 574 5000
Fax 763 574 5298

Asia Pacific

10 Toh Guan Road #07-01
TT International Tradepark
Singapore 608838
Phone 65 6417 2388
Fax 65 6417 2399

Our energy working for you.™

www.cumminspower.com

© 2009 Cummins Power Generation Inc. All rights reserved. Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. "Our energy working for you." is a trademark of Cummins Power Generation. Specifications are subject to change without notice. SS26-CPGK-RevA (11/09).

